

## Lithium-ion Rechargeable Specification

Product name: LiFePO4 battery

Product model: 128-60BP

|                        |          |  |
|------------------------|----------|--|
| Specification Approved | PREPARED |  |
|                        | CHECKED  |  |
|                        | APPROVED |  |

### Revised List

| Version No | Description of Revise | Date       | Prepared |
|------------|-----------------------|------------|----------|
| A0         | New Publish           | 2023-11-20 | Joan Li  |
|            |                       |            |          |
|            |                       |            |          |
|            |                       |            |          |

**SHENZHEN HIMAX ELECTRONICS CO.,LTD.**

Add: Building B, Nantong Avenue NO.5, Tongle Community, Baolong Street,  
Longgang Shenzhen China

Tel: 86 (0) 755-25629920 Fax: 86 (0) 755-25629925

[www.himaxelectronics.com](http://www.himaxelectronics.com)

## Content

|  |        |
|--|--------|
| 1. Scope.....                                    | P.3    |
| 2. Model.....                                    | P.3    |
| 3. Reference standard.....                       | P.3    |
| 4. Specification.....                            | P.3~4  |
| 5. PCM Parameter.....                            | P.4    |
| 6. Product Circuit diagram .....                 | P.5    |
| 7. Electrical Performance & test condition ..... | P.5~6  |
| 8. Mechanical Performance .....                  | P.6    |
| 9. Cell Safety Performance .....                 | P.7    |
| 10. Delivery/Packing/Storage and Shipment .....  | P.7    |
| 11. Battery Pack Feature .....                   | P.8    |
| 12. Period of Warranty .....                     | P.9    |
| 13. Warnings .....                               | P.9    |
| 14. Battery operation instruction .....          | P.9~10 |
| 15. Others .....                                 | P.10   |

## 1. Scope

This product specification describes HIMAX's LiFePO<sub>4</sub> battery. Please using the test methods that recommend in this specification. If you have any opinions or advice about the test items and methods, please contact us.

## 2. Model

Model: 128-60BP

## 3. Reference standard

The standard reference GB/T18287-2013, UL1642 and CE61960 technology standards compiled.

## 4. Specification


|                     | Item                             | Rating                      | Note                                     |
|---------------------|----------------------------------|-----------------------------|--|
| <b>Cell</b>         | Type                             | LiFePO <sub>4</sub> Battery |  |
|                     | Cell Model                       | 32135-15                    |  |
|                     | Nominal Capacity                 | 15Ah                        | Discharge: 0.2C<br>Cut-off Voltage:2.5V  |
|                     | Minimum Capacity                 | 15Ah                        | Discharge: 0.2C<br>Cut-off Voltage: 2.5V |
|                     | Nominal voltage                  | 3.2V                        |  |
|                     | Internal Impedance               | ≤3mΩ                        |  |
|                     | Dimension                        | Max. 33.0x140.3mm           |  |
|                     | Weight                           | Approx268g                  |  |
| <b>Battery pack</b> | Pack Method                      | 4S4P                        |  |
|                     | Nominal Capacity                 | 60Ah                        | Discharge: 0.2C<br>Cut-off Voltage:10V   |
|                     | Minimum Capacity                 | 59.5Ah                      | Discharge: 0.2C<br>Cut-off Voltage: 10V  |
|                     | Nominal Voltage                  | 12.8V                       |  |
|                     | Energy                           | 768Wh                       |  |
|                     | Charge Voltage                   | 14.4V                       |  |
|                     | Discharge cut-off voltage        | 10V                         |  |
|                     | Charge Method                    | CC/CV                       |  |
|                     | Standard Charge Current          | 12A                         |  |
|                     | Max. Charge Current              | 30A                         |  |
|                     | Standard Discharge Current       | 12A                         |  |
|                     | Max. Continues Discharge current | 120A                        |  |

|                           |   |                |
|---------------------------|---|----------------|
| Cycle Life                | 2000 times (次)                            | 80% SOC        |
| Internal Impedance        | $\leq 10\text{m}\Omega$                   |                |
| Dimension                 | 290*270*46mm                              |                |
| Output Wire               | 3135AWG 8#                                | 500 $\pm$ 10mm |
| Connector                 | /   |                |
| Weight                    | Approx 5.5kg                              |                |
| Working Temperature Range | Charge: 0°C~45°C<br>Discharge: -20°C~60°C |                |
| Storage Temperature       | -10°C~45°C                                |                |

## 5. PCM Parameter

| No. | Item              |                               | Standard                |
|-----|-------------------|-------------------------------|-------------------------|
| 1   | Charge Current    |                               | $\leq 120\text{A}$      |
| 2   | Discharge Current |                               | $\leq 120\text{A}$      |
| 3   | Overcharge        | Over-Charge Detect Voltage    | 3.75V $\pm$ 0.035V      |
|     |                   | Over-Charge Delay Time        | 0.5-1.5S                |
|     |                   | Over-Charge Reset Voltage     | 3.55V $\pm$ 0.050V      |
| 4   | Over-discharge    | Over-Discharge Detect Voltage | 2.20V $\pm$ 0.050V      |
|     |                   | Over-Discharge Delay Time     | 0.5-1.5S                |
|     |                   | Over-Discharge Reset Voltage  | 2.70V $\pm$ 0.100V      |
| 5   | Over-current      | Over-Current Detect Current   | 480 $\pm$ 100A          |
|     |                   | Over-Current Delay Time       | 0.5-1.5S                |
|     |                   | Reset                         | Release load            |
| 6   | Short Circuit     | Detect Status                 | External Short Circuit  |
|     |                   | Reset                         | Release load            |
| 7   | Resistance        |                               | $\leq 15\text{m}\Omega$ |

## 6. Product Circuit diagram

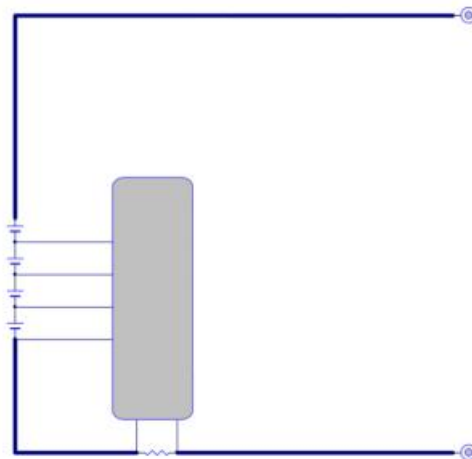

## 7. Electrical Performance & test condition

### 7.1 Standard Test Condition

The battery shall be evaluated within 1 month from the arrival date.

Unless otherwise stated in these specifications, the following test shall be carried out in an ambient temperature of  $20\pm 5^{\circ}\text{C}$ , relative humidity of  $65\pm 20\%$ ,

Discharge capacity when the battery is discharged at 12A to 10V after being standard charged. Five cycles are permitted for this test. The test shall be terminated at the end of the first cycle which meets the requirement.

### 7.2 Testing Instrument or Apparatus

#### 7.2.1 Dimension Measuring Instrument

The dimension measurement shall be implemented by instruments with equal or more precision scale of 0.01mm specified.

#### 7.2.2 Voltmeter and Ammeter

Voltmeters and ammeters shall be equal or more precision instruments of  $10\text{K}\Omega/\text{V}$  and  $0.01\Omega$ .

#### 7.2.3 Impedance Meter

Impedance shall be measured by a sinusoidal alternating current method (1kHz LCR meter).

### 7.3 Standard Charge

Standard charge means charging for 6hours using 14.4V/12A charger.

### 7.4 Standard Discharge

Standard discharge means discharging at 12A down to 10V.

### 7.5 Electrical Performance

| Item                        | Condition  | Specification |
|-----------------------------|--|---------------|
| Open-Circuit Voltage        | The open-circuit voltage shall be measured within 24hours after standard charge.   | ≥13.2V        |
| Battery Capacity            | The discharge time at 12A shall be measured after standard charge at 20±5℃ and rest 30mins.  | ≥95%          |
| Cycle Life                  | The discharge time on standard discharge shall be measured after 2000 cycles of standard charge and discharge at 20±5℃.            | ≥80%          |
| Charge(capacity) retention  | The discharge time at 12A shall be measured after standard charge and then storage at 20±5℃ for 28days.                            | ≥95%          |
| Temperature Characteristic1 | After standard charging at 20±5℃, laying the battery at 55℃ for 2hours, then discharge at 12A to 10V, record the discharge time.   | ≥85%          |
| Temperature Characteristic2 | After standard charging at 20±5℃, laying the battery at -10℃ for 4hours, then discharge at 12A to 10V, record the discharge time . | ≥60%          |

### 8. Mechanical Performance

| Item       | Condition  | Specification                         |
|------------|--|---------------------------------------|
| Crush Test | A battery is to be crushed between two flat surfaces. The force for the crushing is to be applied by a hydraulic ram with a 32mm diameter piston. The crushing is to be continued until a pressure reading of 17.2mmPa is reached on the hydraulic ram, applied force of 13kN. Once the maximum pressure has been obtained it is to be released. | No fire,<br>No explosion              |
| Drop Test  | The battery has only two axes of symmetry in which case only two directions shall be tested. The battery is to be dropped from a height of 1 meter twice onto concrete ground.   | No explosion,<br>No fire,<br>No smoke |
| Vibration  | A full-charged battery is to be subjected to simple harmonic motion with an amplitude of 1.6mm total maximum excursion. The frequency is to be varied at the rate of 1 hertz per minute between 10 and 55 hertz. The cell shall be vibrated for 30 minutes per axis o XYZ axes.  | No leakage<br>No Fire<br>No explosion |

## 9. Cell Safety Performance

| Item           | Condition  | Specification   |
|----------------|--|---|
| Over charge    | At 20±5℃, charging battery with constant current 1C to voltage 4V, then with constant voltage 4V till current decline to 0.  | No explosion<br>No fire   |
| Over discharge | At 20±5℃, the cell are fully charged with standard charging method and standby at least 1 hour. The cell should be discharged at a current of 1C for 2.5h.   | No explosion<br>No fire<br>No leakage   |
| Short-circuit  | At 20±5℃, The cells are fully charged with standard charging method and standby at least 1hour. Positive and negative terminal connect with wire (maximum load of 50mΩ) to cause short circuit until its voltage is lower than 0.1V or cell temperature on the surface is back to room temperature ±10℃. | No explosion, No fire<br>The temperature of the surface of the cell are lower than 150℃ |
| Heating        | Battery is heated in a circulating air oven at a rate of 5±2℃ per min to 130℃, an then placed 30 mins under 130℃.  | No explosion,<br>No fire  |

## 10. Delivery/Packing/Storage and Shipment

10.1 Approx. 30-70% charged before delivery, Shipment voltage: 12.8-13.4V.

10.2 The battery should be checked the voltage, resistance and the function of protective circuit before shipment.

10.3 Packing and Shipping


10.3.1 The battery should be transported to the factory assembly, to pay special attention to the packing, in order to avoid transport stress.


10.3.2 The battery should be in a half state of charge packaging boxes for transport, in the transport process, prevent severe vibration, shock, extrusion, prevent the sun and rain, should be in automobile, train, ship, airplane and other forms.

10.4 Abnormal Condition

Do not use the battery when it's smell like abnormal cell electrolyte because of transport stress, sag, short circuit or any other.

### 11. Battery Pack Feature

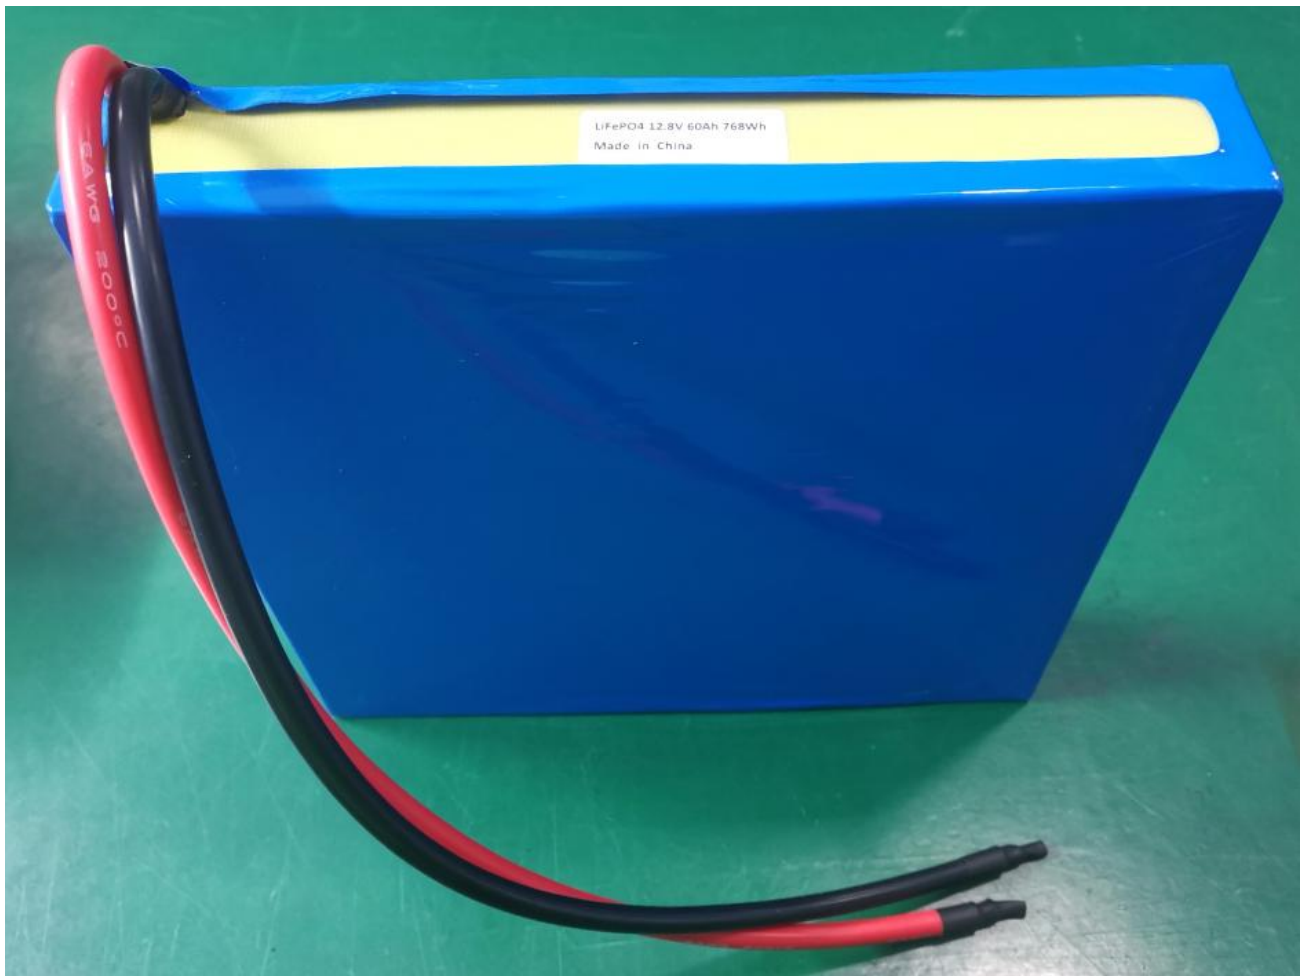

|                  |                   |  |             |
|------------------|-------------------|--|-------------|
| <b>HMS Model</b> | 128-60BP          |  |             |
| <b>File No.</b>  | HLFGB04 0060-1480 | <b>Signature</b>   | <b>Date</b> |
| <b>Revision</b>  | A0                | <b>Drawn by</b>  | Joan Li     |
|                  |                   |  | 2023-11-20  |



## 12. Period of Warranty

The period of warranty is 1 year from the date of shipment. HIMAX guarantees to give a replacement in case of battery with defects proven due to manufacturing process instead of the customer abuse and misuse.

## 13. Warnings

To prevent the possibility of the battery from leaking, heating, fire, Please READ this specification carefully before usage and observe the following precautions:

- Ⓢ When recharging, use the LiFePO4 battery charger specifically for that purpose.
- Ⓢ Do not strike battery with any sharp edge parts, such as Ni-tabs, pins and needles.
- Ⓢ Do not immerse the battery in water and seawater.
- Ⓢ Do not use and leave the battery near a heat source as fire or heater.
- Ⓢ Do not reverse the positive and negative terminals.
- Ⓢ Do not connect the battery to an electrical outlet.
- Ⓢ Do not discard the battery in fire or heat it.
- Ⓢ The battery tabs are not so stubborn especially for aluminum tab. Do not bend tab.
- Ⓢ Do not short-circuit the battery by directly connecting the positive and negative terminal with metal object.
- Ⓢ Do not transport and store the battery together with metal objects such as necklaces, hairpins etc.
- Ⓢ Do not knock or throw, trampling battery etc.
- Ⓢ Do not directly solder the battery and pierce the battery with a nail or other sharp object.
- Ⓢ Do not split the battery without permission.

## 14. Battery operation instruction

### 14.1 Charging

Charging current: Do not surpass the biggest charging current which in this specification.

Charging voltage: Do not surpass the highest voltage which in this specification.

Charge temperature: The charge temperature is in according to this specification.

### 14.2 Discharging

Discharge current: Do not surpass the biggest discharge current which in this specification.

Discharging with a higher current may result in the capacity fade and over-heat.

Discharge temperature: The discharge temperature is in according to this specification.

### 14.3 Over-discharges

After the short time excessively discharges charges immediately cannot affect the use, but the long

time excessively discharges can cause the battery the performance, battery function losing. The battery long-term has not used, has the possibility to be able to be at because of its automatic flashover characteristic certain excessively discharges the condition, for prevented excessively discharges the occurrence, the battery should maintain the certain electric quantity.

#### **14.4 Storing the Batteries**

*The battery should store in the product specification book stipulation temperature range. If has surpasses above for 3 months the long time storage, suggested you should carry on additional charge to the battery.*

14.5 Please do not continuously charge the battery over 8hours.

#### **15.Others**

◎The customer is requested to contact HIMAX in advance, if and when the customer needs other applications or operating conditions than those described in this document. Additional experimentation may be required to verify performance and safety under such conditions.

◎HIMAX will take no responsibility for any accident when the battery is used under other conditions than those described in this Document.

◎HIMAX will inform, in a written form, the customer of improvement(s) regarding proper use and handing of the battery, if it is deemed necessary.